



How to fix the holes in the shingles using the "Bibby"

Fix it Once. Fit it Right. Show your clients you're a Pro! Never fix a hole with roof tar or caulk on the surface of the shingle. The repair will only last 3 - 7 years. Use a "Bibby" and fix it from underneath the shingle. If you do it right, the repair will last the life of the shingle!




If you keep some black, bronze, grey, and brown Geocel (available at ABC Supply) on your truck, your repairs will become invisible!

Remove Slator or Slator-Mini from roof. Exposing holes in asphalt shingles.




1. Use serrated edge of BIBBY in a "sawing" manner to cut the "seal" between the shingles in these (2) locations.

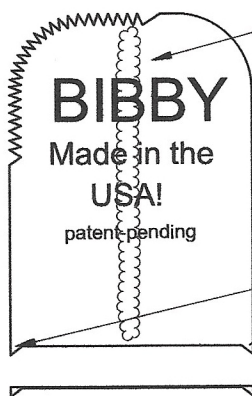


3. Lay a thin line of Geocel here and place a single "dab" on the back side.

2. Use pliers or the "claw" of your hammer to bend these (2) tabs down 90 degrees.



4. Gently pry up the shingles in these (2) locations and slide the Bibbys underneath the shingles and push down on the shingles until the "Geocel" is oozing out through the holes in the shingle. Wipe off excess.



5. Gently tap the "tab" locations with a hammer (imbedding the tabs partly into the shingle below).

Wipe off any additional excess "Geocel" and, Congratulations! You're done!